



# TX Advanced




## Weights and dimensions

SWL : 130 kg, 200 kg, 272 kg  
Unit weight : 10.4 kg  
Carry bar weight : 2 kg

A : 340 mm  
B : 250 mm  
C : 135 mm  
D : 413 mm

Lifting range : 2,000 mm  
Lift tape width : 50 mm  
Carry bar width : 615 mm

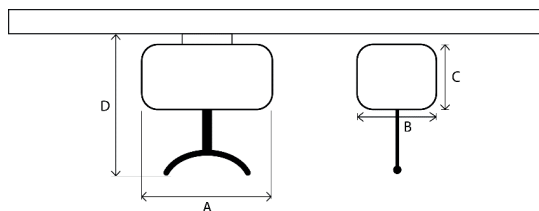

## Features

Hand control : Wired pneumatic handset  
Display : LCD battery level and service information

Duty cycle : 15% use, 85% rest  
Battery : 2x12 V SLA, 5 Ah  
Charging time : 8.5 hours  
Lifts per charge : 130 lifts at 130 kg  
: 65 lifts at 200 kg  
: 35 lifts at 272 kg

Emergency stop : Yes  
Emergency lowering : Manual and electrical

IP rating (hoist) : IP21  
IP rating (handset) : IP67  
Carry bar type : QRS, 3 hook, looped  
Cover material : UL 94 V-0 flame retardant ABS

## Standards

IEC 60601-1:2012 IEC 62366-1:2015  
IEC 60601-2:2014 ISO 10535:2006  
IEC 60601-1-11:2010 EN ISO 15223-1:2016





# TX Advanced

## Step 1

Select Max User Weight (kg)

- 130 kg
- 200 kg
- 272 kg

## Step 2

Select Traverse Type

- Manual
- Powered

## Step 3

Select Track Type

- Prism Track
- Track Type 2
- Track Type 3
- Track Type 4
- Track Type 5

## Step 4

Select An Option

- Quick Release Trolley (QRT)
- Constant Charge
- Powered "H" System
- Powered Turntable
- No Option

